

*The enhanced QE, high-resolution, large-format camera for low spectroscopic signals*

## Synapse<sup>®</sup> 2048 × 512 Back-Illuminated CCD Detector



The HORIBA Scientific Back-Illuminated 2048 × 512 CCD is ideal for low-noise acquisitions required in spectroscopic applications. Its 13.5 μm × 13.5 μm pixels offer very high spectral resolution, designed with a low-noise amplifier for extremely low readout noise. This detector is better-suited for emission spectroscopy where peaks are narrow.

Feature	Spectroscopy Benefits
Deep Thermoelectric Cooling	Low dark signal with no need for liquid nitrogen
Lifetime Vacuum Warranty	All-metal sealed technology allows a permanent vacuum, letting us offer a lifetime warranty
Excellent Linearity	Increased accuracy of data over the full dynamic range
USB 2.0 Interface	Standard connection to PC notebooks and desktops with 100% data integrity
Auxiliary Signal Input	Unique ability to add measurements from single-channel detectors without additional electronics
High Resolution 13.5 μm pixels	Pixels are matched to spectrograph slits for highest resolution
Scientific Grade 1 CCD	Ideally suited for low light level detection in a variety of spectroscopic applications
HORIBA Scientific's SynerJY <sup>®</sup> Software	Complete control of a Synapse CCD and HORIBA Scientific Spectrograph system with full analysis capabilities
LabVIEW VIs and SDK Available	Flexible software to integrate a Synapse CCD into existing apparatus or as an OEM component





## Specifications\*

CCD Format	2048 × 512, front-illuminated, UV-coated, Scientific Grade 1			
Pixel Size	13.5 μm × 13.5 μm			
Image Area	27.6 mm × 6.9 mm, 100% fill factor			
Cooling System	Four-stage thermoelectric cooling. Typical operating temperature -80°C, guaranteed to -75°C. External cooling option available (-95°C typical).			
		Minimum	Typical	Maximum
Readout Noise	20 kHz		3 e <sup>-</sup> rms	4 e <sup>-</sup> rms
	1 MHz		10 e <sup>-</sup> rms	15 e <sup>-</sup> rms
Pixel Well Capacity		150 ke <sup>-</sup>	250 ke <sup>-</sup>	
Register Well Capacity			1000 ke <sup>-</sup>	
Dark Current			0.002 e <sup>-</sup> /pixel/s	
Nonlinearity	< 0.4% at 20 kHz < 1% at 1 MHz			
Scan Rates	20 kHz and 1 MHz, software-selectable			
Software-Selectable Gains	3 software-selectable gains			
Dynamic Range	16 bits			
Vertical Shift Rates	36 μs, 9 μs			
Maximum Spectral Rate	20 kHz	6 Hz		
	1 MHz	140 Hz		

\*Specifications subject to change without notice.

### Typical Spectral Response

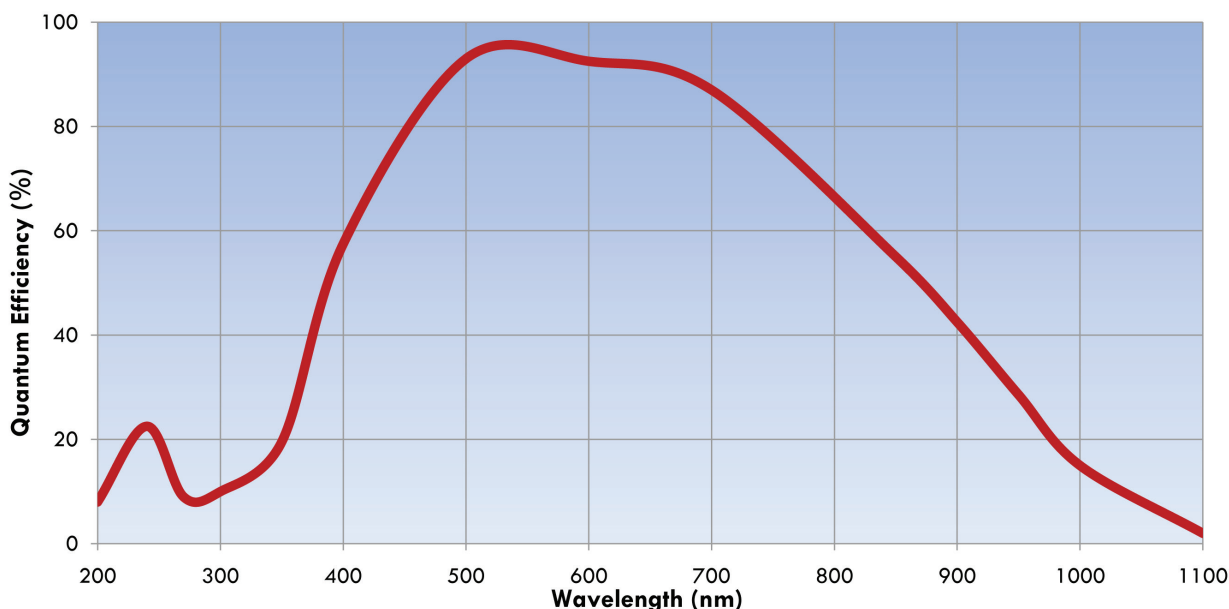

# HORIBA

## Scientific

### Ordering Information:

**CCD-2048x512-BIVS-SYN Synapse Thermoelectric Cooled CCD System**

Our CCD packages include a CCD shutter for clean CCD charge transfer and background subtraction.

ELEMENTAL ANALYSIS

FLUORESCENCE

GRATINGS &  
OEM SPECTROMETERS

OPTICAL COMPONENTS




PARTICLE CHARACTERIZATION

RAMAN

SPECTROSCOPIC ELLIPSOMETRY

SPR IMAGING

## Mechanical Dimensions

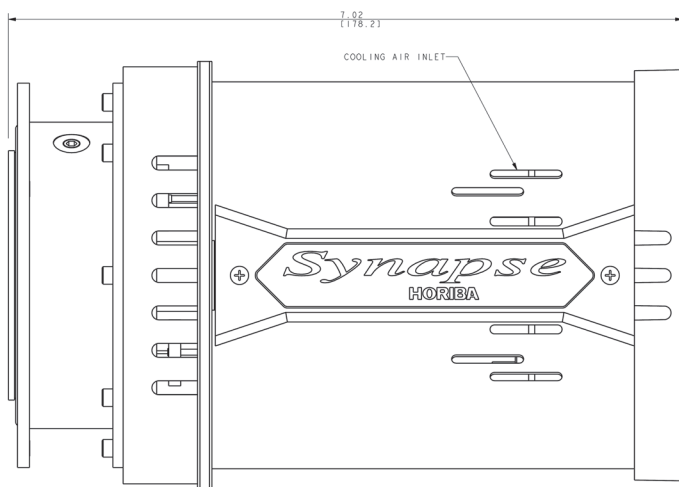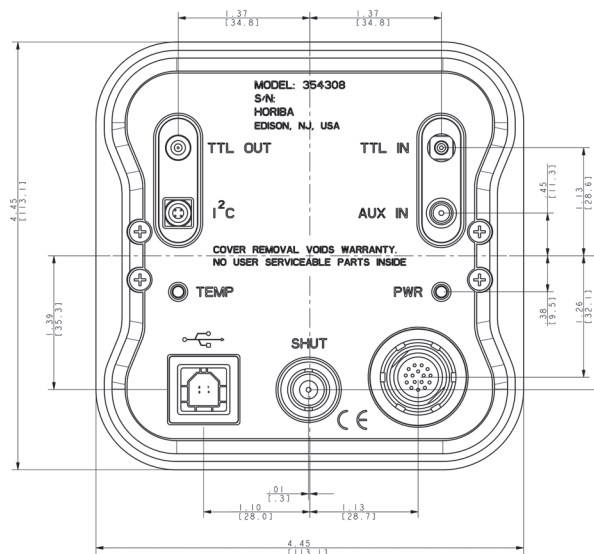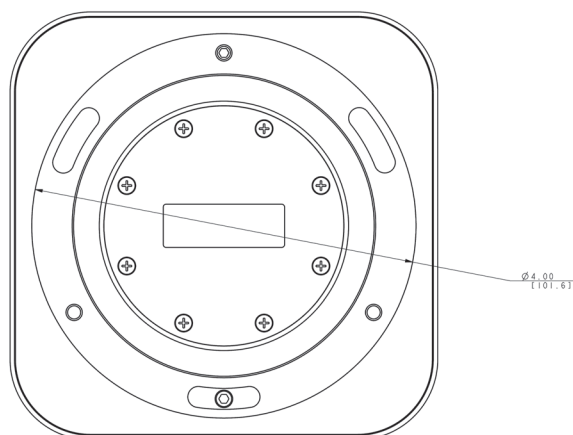

[info-sci@horiba.com](mailto:info-sci@horiba.com)  
[www.horiba.com/scientific](http://www.horiba.com/scientific)

**HORIBA**  
Scientific

**USA:** +1 732 494 8660  
**UK:** +44 (0)20 8204 8142  
**Spain:** +34 91 490 23 34  
**Other Countries:** +33 (0)1 64 54 13 00

**France:** +33 (0)1 64 54 13 00  
**Italy:** +39 0 2 5760 3050  
**China:** +86 (0)10 8567 9966

**Germany:** +49 (0)89 4623 17-0  
**Japan:** +81 (0)3 38618231  
**Brazil:** +55 11 5545 1540



This document is not contractually binding under any circumstances. P/N: OSD-0069 S/N/rev. © HORIBA Instruments Incorporated 09/2012