

Designed for use in the NIR, applications include NIR Raman, photoluminescence, emission, and absorbance spectroscopy.

Symphony II Linear Extended InGaAs Array

SII-1LS-512-25-22

SII-1LS-512-50-22

SII-1LS-1024-25-22

HORIBA Scientific's 512 × 1 Symphony II Extended InGaAs arrays are the ideal choice for demanding, low-light-level measurements in the near infrared (NIR) spectral region from 1000–2200 nm. Offered in 512 × 1 (25 × 250 μm), 512 × 1 (50 × 250 μm), and 1024 × 1 (25 × 250 μm), pixel formats, these InGaAs detectors provide high resolution while maintaining full well capacity. Symphony II InGaAs arrays feature a 16-bit dynamic range, are liquid-nitrogen cooled to minimize dark noise, and use a mechanical shutter for subtraction of the dark background. Available with a 3-liter dewar for hours of uninterrupted data-collection. A plug-and-play USB 2.0 interface allows portability and easy setup on PC notebooks and desktop computers with 100% data integrity. Applications include near-IR Raman, photoluminescence measurements of semiconductors, SWCNTs, and nanowires. Detectors with sensitivity from 0.8 μm to 1.7 μm are also available.



Feature	Spectroscopy Benefits
Cryogenic Cooling	Cools the array to -103°C to minimize dark noise
Excellent Linearity	High accuracy of data over the full dynamic range
USB 2.0 Interface	Easy to use; connects to PC notebooks and desktops with 100% data integrity
High Sensitivity (HiS) and High Dynamic Range (HiD) modes	Software selection of acquisition mode to optimize detector for best signal-to-noise ratio
Auxiliary Signal Input	Unique ability to add measurements from single-channel detectors without additional electronics
HORIBA Scientific's SynerJY® Software	Complete control of a Symphony II CCD and HORIBA Scientific Spectrographs system with full analysis capabilities
LabVIEW VIs and SDK Available	Flexible software to integrate a Symphony II CCD into existing apparatus or as an OEM component




Specifications*

Format		512 × 1 (25 × 250)	512 × 1 (50 × 250)	1024 × 1 (25 × 250)
Wavelength Range	Ambient Temp. (25°C) Operating Temp. (-103°C)	1000–2200 nm 1000–2050 nm		
Operating Temperature (Typical)		-103°C		
		Typical		
Readout	HiS Mode (High Gain)	0.5–0.8 ke ⁻ rms		
Noise	HiD Mode (Low Gain)	5–8 ke ⁻ rms		
Full Well Capacity	HiS Mode (High Gain)	5 Me ⁻		
	HiD Mode (Low Gain)	130 Me ⁻		
Dark Current		2 Me ⁻ /p/s		
Response Nonuniformity		± 10%	± 10%	± 10%
Response Nonlinearity		< ± 1%		
Gain (Nominal)	HiS Mode (High Gain)	58 e ⁻ /count		
	HiD Mode (Low Gain)	1545 e ⁻ /count		
Dynamic Range		16 bit		
Pixel Defects		Max of 10 dark or hot pixels	Max of 10 dark or hot pixels	Max of 20 dark or hot pixels

*Specifications subject to change without notice.

Quantum Efficiency at 25°C

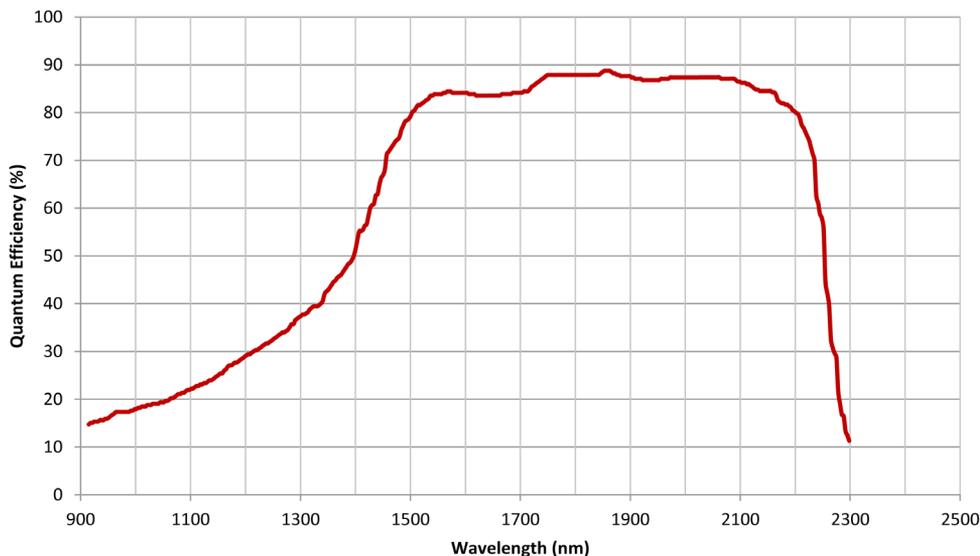

info.sci@horiba.com
www.horiba.com/scientific

HORIBA
Scientific

USA: +1 732 494 8660
UK: +44 (0)20 8204 8142
China: +86 (0)21 6289 6060

France: +33 (0)1 69 74 72 00
Italy: +39 2 5760 3050
Brazil: +55 (0)11 5545 1500

Germany: +49 (0)89 4623 17-0
Japan: +81 (0)3 6206 4717
Other: +33 (0)69 74 72 00



This document is not contractually binding under any circumstances. Rev. B © HORIBA Instruments Incorporated 04/2013